


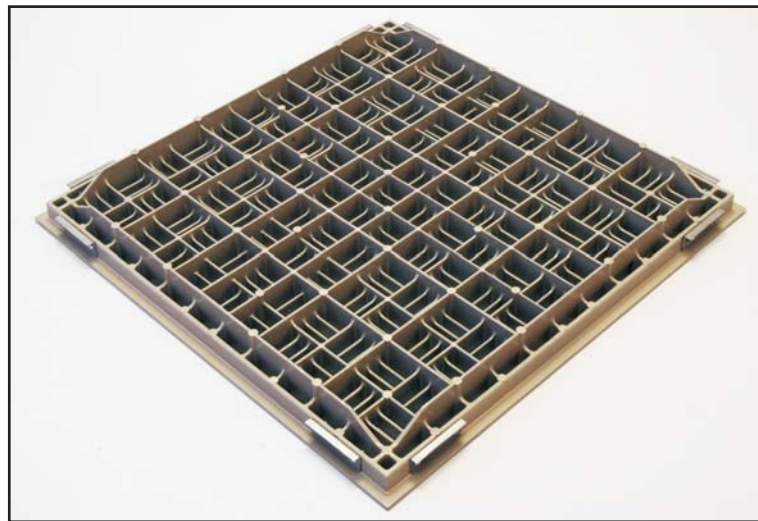


Camino cast aluminum "Grate" Air Flow Panels.

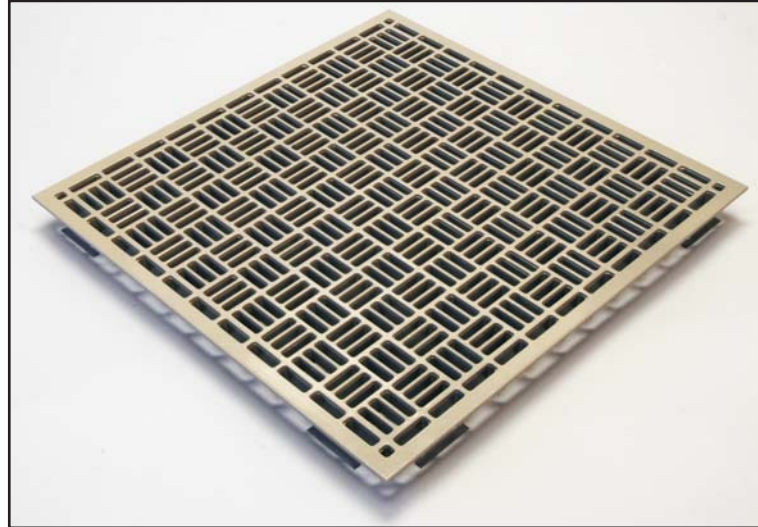

- Compatible with our FS, SC, and WC Series access floor systems.
- Static dissipative powder coat finish.
- Slide damper allows for precise CFM requirements.
- Load ratings of 1250 lbs. per sq.in. To ensure performance equal to solid floor panels.
- 56% open area generates over twice the air flow when compared to traditional perforated panels.



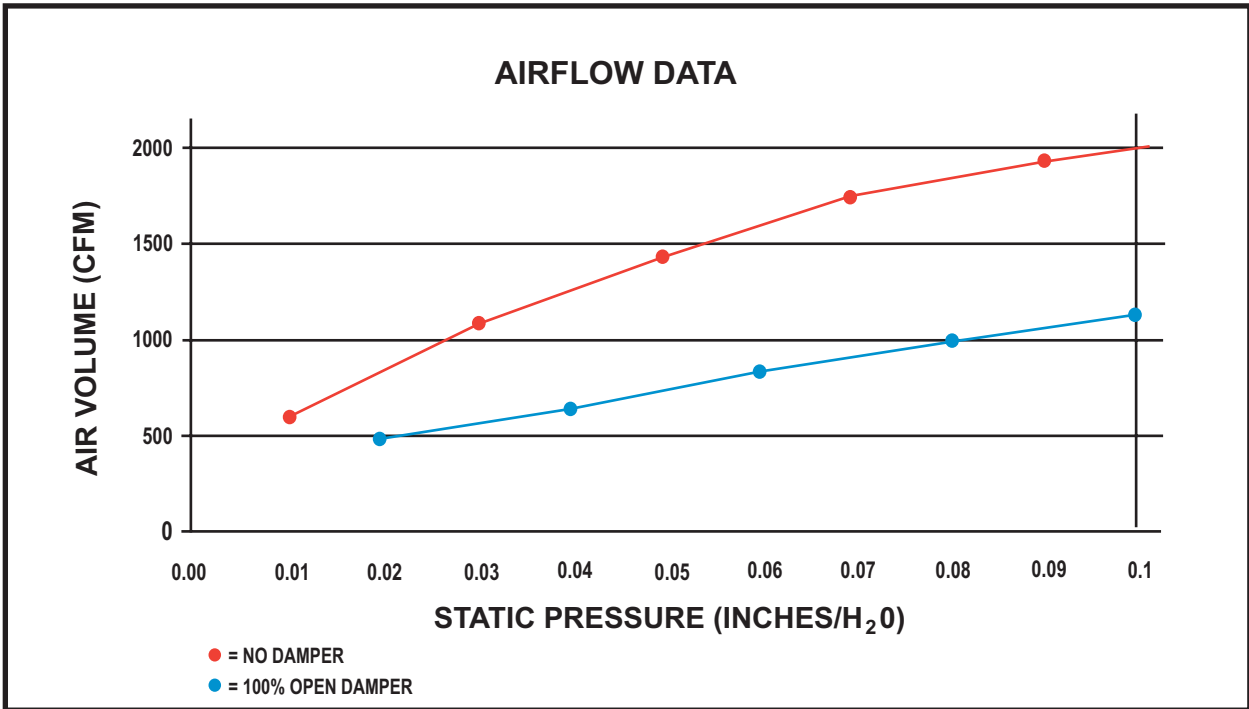

Slide damper

Panel Type	Understructure	Concentrated Load	Safety Factor
GAF 1250	Bolted Stringer	1250 lbs/sq. In.	>2

Load testing based on Cisca test procedures.